



-4-

[www.vinsonacoustics.com](http://www.vinsonacoustics.com)



**108T**

8" 2-Way Indoor/Outdoor Speaker

[www.vinsonacoustics.com](http://www.vinsonacoustics.com)

## Specifications

- Available in black or white finish
- Bar mounting system included
- 8" Polypropylene woofer with 1" tweeter
- Adjustable Line Transformer: 4/8/16/30w (70V)
- Impedance: 8 ohms
- Rated Power: 85W – 125W (max)
- Frequency response: 45Hz – 20Khz
- Sensitivity: 90dB
- Size: H x W x D (inch): 16.5" x 10.0" x 9.8"

## Installation Instructions


- Recommended wiring: weather proof copper wire (or heavier)
- Ensure that the speakers are installed on a surface sturdy enough to support their weight. Fasten properly and securely.
- Take into account the targeted listening area and potential safety hazards when choosing speaker installation and location.
- Please refer to the following illustrations for assembly and installation instruction.

-2-

[www.vinsonacoustics.com](http://www.vinsonacoustics.com)


## Installation Diagrams

### Assembly Example




### Installation Example

- All speakers have to be connected to the constant voltage line (see figure below). The output power can be adjusted at the rear of the speaker. (70 Volt installation)
- Check that the transformer is set to be equal or lower than the nominal power supplied by the amplifier (70 Volt installation)

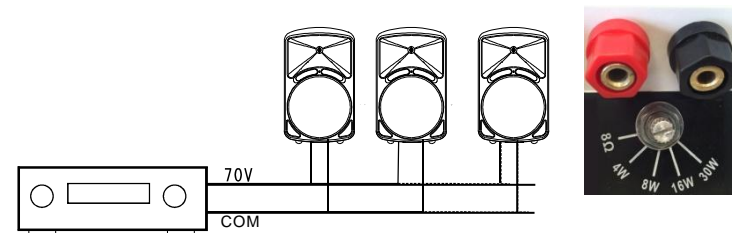

- For normal residential systems that require 8 ohm speakers, adjust the dial on the rear of the speaker to 8 ohm and connect to receiver. (see figure below)

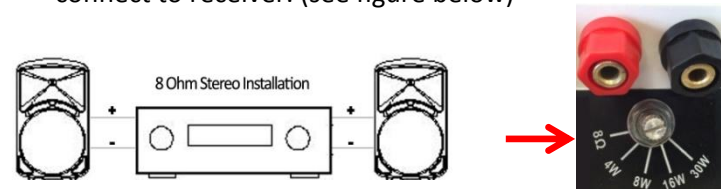

-3-

[www.vinsonacoustics.com](http://www.vinsonacoustics.com)